



Directional dual antenna

Features

- Directional
- 8 dBi gain
- 1850-1990 MHz
- Mountable to wall or pole

The 'directional dual antenna' consists of two flat directional antennas housed in a plastic shroud. It is fitted with 1 meter of coaxial cable and a MCX male connector. The antenna includes a side tilt and a wall bracket by which it can be adjusted in a horizontal plane. The antenna can be mounted to a pole of 40 to 90 mm in diameter by means of a steel strap (included).

Specifications

Specifications subject to change without prior notice.

General

Manufacturer: Huber+Suhner
Product code manufacturer: SPA 1900/85/8/0/DS

Physical


Size: 101(h) × 95(w) × 32(d) mm
Weight: 0.11 kg
Material/colour: housing: ASA and aluminium, light grey RAL 7035
radome: ASA, dark grey RAL7042

Environmental


Operating and storage temperature: -40 to +80 °C

Functional Specs

Frequency range: 1850 to 1990 MHz
Nominal impedance: 50 ohms
VSWR: 1.5
Polarization: dual linear, ± 45° slant
Gain: 8 dBi
Radiation in horizontal plane: beam width (H-plane) at -3 dB: 85°
Radiation in vertical plane: beam width (E-plane) at -3 dB: 75°
Down tilt: 0°
Front to back ratio: 12 dB
Isolation between ports: 30 dB
Maximum power: 75 watts (CW) at 25 °C
Connector: MCX male connector at the end of a 1 m ENVIROFLEX 316D coaxial cable

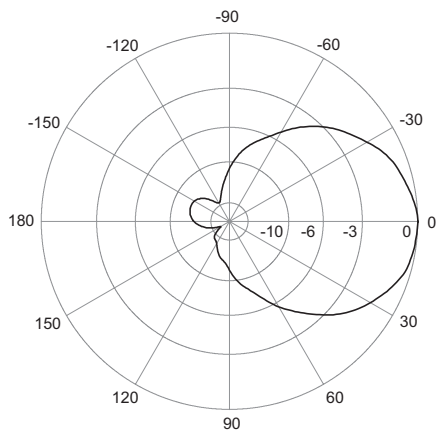

Typical radiation in horizontal plane

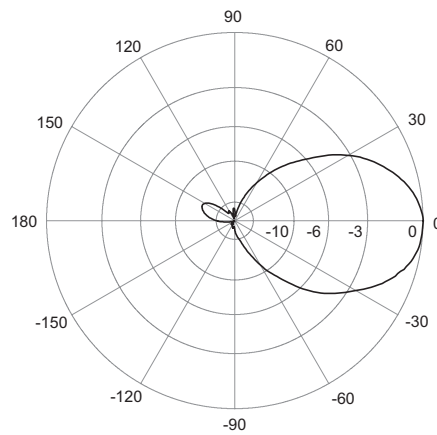

Typical radiation in vertical plane

Ascom Tateco AB
 Wireless Solutions
 PO Box 8783 SE-402 76 GÖTEBORG
 T -46 31 55 94 00 F +46 31 55 63 78
www.ascom.com/ws

M0266501 Ver. A June 2004 Ascom Tateco AB
 Specifications are subject to change without notice.